




LEGENDARY
RELIABILITY
SINCE 1927

Operation & Maintenance


Step 1:

Slide clean, lightly lubed collar and clean dry hose on to the Gripper head of your HOSEDAWG™. DO NOT lubricate the interior of the hose.

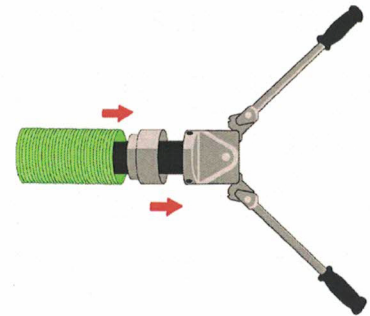

Step 2:

Compress handle to draw hose on to collar. Open handles and repeat until collar is completely seated.

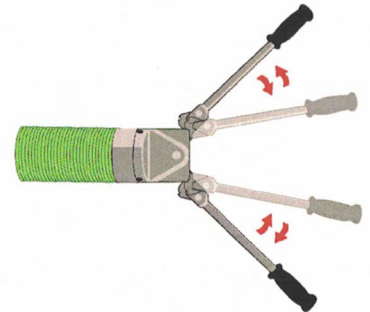

ROUTINE MAINTENANCE

For best service lightly lubricate the head pin (top arrow) and behind the gripper teeth (bottom arrow) with a light grease from an aerosol can once a year or after 50 uses.



www.PETOL.com

sales@petol.com | 254.675.8651

4450 S. Hwy. 6 | P.O. Box 192 | Clifton, TX 76634