

SAFE, EASY & EFFECTIVE

PETOL™ Flange Lifting Shackle

(Patent #10,703,611)

PETOL™ Flange Lifting Shackles are designed to securely attach to blind and weld neck flanges providing a safe and effective method of installation or removal in both construction and maintenance applications. No lifting eye is required. The tool attaches to the flange with ease and automatically adjusts to the bolt hole spacing. The workpiece can then be safely lifted by a crane, hoist or other lifting mechanism.

- » Complies with ASME Specifications B30.20 and BTH-1, Design Category B, Service Class 4
- » Stamped with Load Rating and serial number
- » Supplied Data Book contains operating instructions, warnings, load test certificates and MPI certificate


Specifications

Part No.	Fits Bolt Size	Fits Flange Thickness	Weight	Rated Load
FLS3	5/8" min.	up to 3"	18-1/2 lbs.	2,000 lbs.
FLS6	7/8" min.	up to 6"	32 lbs.	5,000 lbs.
FLS11	1-1/8" min.	up to 11"	49-5/8 lbs.	14,000 lbs.

For more information,
visit www.PETOL.com

254.675.8651 | sales@petol.com | Clifton, Texas

— ISO9001 Quality System Certified —

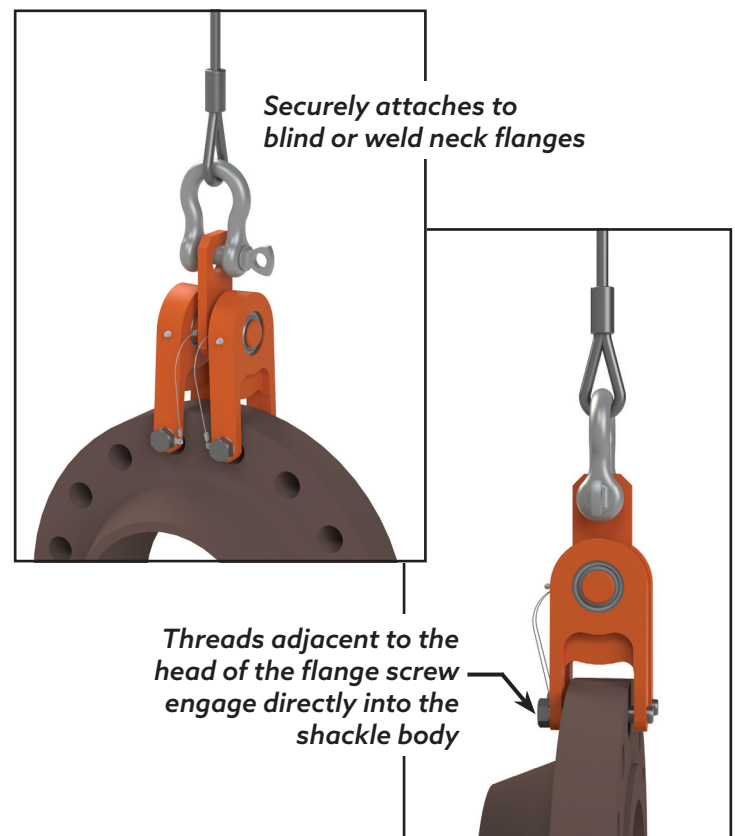

GEARENCH™
is Now PETOL™

