


PETOL™ Flange Lifter

(Patent #8,434,800 and #8,434,801)


The PETOL™ FLANGE LIFTER provides a safe and easy method of installing and removing blind and weld neck flanges. By eliminating the need to attach a lifting eye to the flange, the tool is both time and cost effective. Each flange lifter is load tested and magnetic particle inspected to ensure safety and quality.

- » Complies with ASME Specifications B30.20 and BTH-1, Design Category B, Service Class 4
- » Stamped with Load Rating and serial number
- » Supplied Data Book contains operating instructions, warnings, load test certificates and MPI certificate

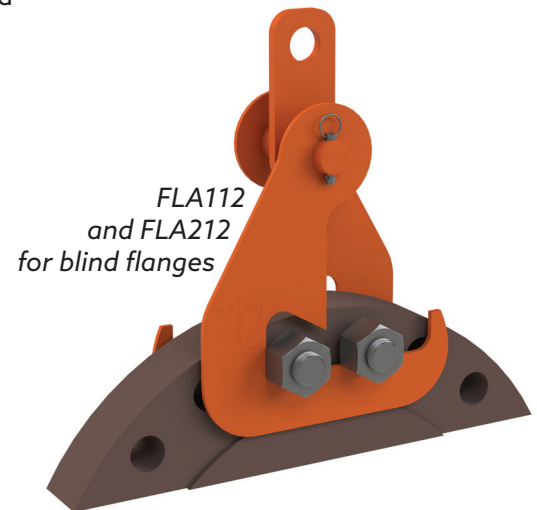

FLA112
and FLA212
for blind flanges

FLA1000, FLA5000
and FLA14000
for blind or
weld neck
flanges

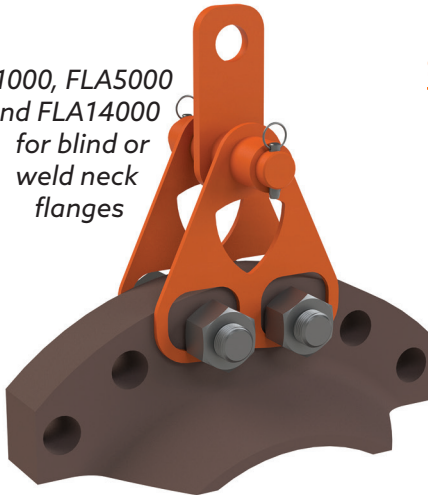

Specifications

Part No.	Fits Bolt Size	Fits Flange Thickness	Weight	Rated Load
FLA112	3/4" - 1-1/2"	1/2" - 3-3/4"	20 lbs.	1000 lbs.
FLA212	1-1/2" - 2-1/2"	1/2" - 7"	37-1/4 lbs.	2000 lbs.
FLA1000	3/4" - 2-1/4"	1" - 6-3/16"	20-3/8 lbs.	1000 lbs.
FLA5000	3/4" - 4"	1" - 11-1/16"	52-7/8 lbs.	5000 lbs.
FLA14000	3/4" - 4"	1" - 11-1/16"	60 lbs.	14,000 lbs.

For more information,
visit www.PETOL.com

254.675.8651 | sales@petol.com | Clifton, Texas

— ISO9001 Quality System Certified —



TM

LEGENDARY RELIABILITY
SINCE 1927